



760 Tapping Machine Model 760C

Operating Specifications

Boring Bar Travel	66" (1,676 mm)
Tank Taps*	3" through 14" (80-350 mm)
Pipe Taps*	3" through 16" (80-400 mm)
LOCK-O-RING® and LOCK-O-RING® Plus Completion Plugs	4" through 16" (100-400 mm)
Max. Operating Pressure	1,480 psi (102 bar) at 100°F (38°C)
Max. Operating Temperature	700°F (371°C) at 700 psi (48 bar)**
Power	Hydraulic or Air Motor
Feed Rate	Standard .005" (.127 mm) per revolution/optional .003" (.076 mm) per revolution
Lower-In Crank	4-1/2 turns per inch (5.6 mm per turn)
Length without measuring rod	88-1/2" (2,248 mm)
Length with measuring rod	158-1/2" (4,026 mm)
Meets NACE specification	MR0175

* See note 5 in "Recommended Power Options" chart

** For intermittent service only. Maximum continuous rating is 350°F (177°C) at 1,025 psi (70 bar).

Range of Tapping Machines

Operating options of the machine according to configuration by feed rate, type of drive and flywheel.
For example, the tapping machine PN 12300073 will have standard feed rate, air motor drive and flywheel.

Tapping Machine Part Number	Feed Rate		Type of Hydraulic Drive			Flywheel
	Slow (.003" / Revolution)	Standard (.005" / Revolution)	Air Motor Drive	Single Motor Drive	Tandem Motor Drive	
12300066	•		•			
12300067	•		•			•
12300068	•			•		
12300069	•			•		•
12300070	•				•	
12300071	•				•	•
12300072		•	•			
12300073		•	•			•
12300074		•		•		
12300075		•		•		•
12300076		•			•	
12300077		•			•	•

760 Tapping Machine Model 760C

Basic Machine Components


	Lb.	Kg.	Part Number
Tapping machine body (standard feed)	500	227	05-1395-0000
Tapping machine body (slow feed)	500	227	05-1393-0000
Air motor drive unit*	40	18	05-2327-0000
Single drive unit & control valve*	45	20	05-2508-0000
Tandem drive unit & control valve*	100	46	05-1379-0000

* These options will work with both feed rate tapping machines (slow and standard).


Additional Equipment

	Lb.	Kg.	Part Number
Skid*	179	81	05-1378-0000
Hydraulic Power Unit and 50' Hose (with oil)			
Manual Start/Diesel	585	266	05-2017-0000
Electric Start/Diesel	600	272	12303420
Manual Start/Gas	533	242	05-2351-0000
Electric Start/Gas	550	250	05-2354-0000
Hydraulic feed system for completion plug installation	45	21	05-1366-0000
Flywheel	46	21	05-2376-0000

* If skid is not purchased with the tapping machine, there will be an additional crating charge; consult factory.



■ Gasoline Power Unit

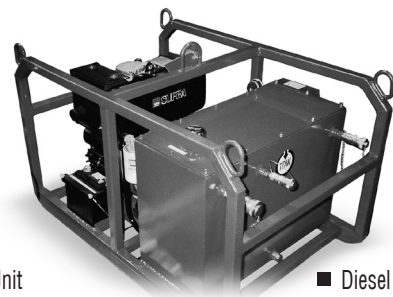

■ Diesel Power Unit



760 Tapping Machine Model 760C

Standard Adapters for Gate Valves

		ASME Class 150 RF Flange			ASME Class 300 RF Flange			ASME Class 600 RF Flange		
Inches	mm	Lb.	Kg.	Part Number	Lb.	Kg.	Part Number	Lb.	Kg.	Part Number
3	80	54	24	06-6102-0003	55	25	06-6103-0003	57	26	06-6105-0003
4	100	57	26	06-6102-0004 *	65	29	06-6103-0004	80	36	06-5091-0004
6	150	70	32	06-5088-0006 *	95	43	06-6103-0006	146	66	06-5091-0006
8	200	85	39	06-6102-0008 *	100	45	06-6103-0008	150	68	06-6105-0008
10	250	115	42	06-6102-0010 *	155	70	06-6103-0010	200	91	06-6105-0010
12	300	170	77	06-6102-0012 *	215	98	06-6103-0012	315	143	06-6105-0012
14	350	191	87	06-6102-0014	227	103	06-6103-0014	359	163	06-6105-0014
16**	400	300	136	06-6102-0016	350	160	06-6103-0016	460	210	06-6105-0016

* Will work on SHORTCUTT® Valves, Bulletin 2010.000.00

** For tandem drive hydraulic model.

Adapters for SANDWICH® Valves & Ball Valves (Compatible to set LOCK-O-RING® and LOCK-O-RING® Plus Completion Plugs)

		ASME Class 150 RF Flange			ASME Class 300 RF Flange			ASME Class 600 RF Flange		
Inches	mm	Lb.	Kg.	Part Number	Lb.	Kg.	Part Number	Lb.	Kg.	Part Number
4	100	65	29	26-3205-0415	7	34	26-3205-0430	85	39	26-3205-0460
6	150	80	36	26-3205-0615	100	45	26-3205-0630	130	59	26-3205-0660
8	200	100	45	26-3205-0815	125	57	26-3205-0830	170	77	26-3205-0860
10	250	170	77	26-3205-1015	210	5	26-3205-1030	285	129	26-3205-1060
12	300	250	113	26-3205-1215	300	136	26-3205-1230	375	170	26-3205-1260
14	350	285	129	26-3205-1415	350	159	26-3205-1430	425	193	26-3205-1460
16	400	400	181	26-3205-1615	490	222	26-3205-1630	610	277	26-3205-1666

Cutter Holders

Inches	mm	Lb.	Kg.	Part Number
3 & 4	80 & 100	2.5	1	05-0054-0001
6-12	150-300	8	4	05-0054-0002
14-16	350-400	7	3	05-0054-0003

Completion Plug Holders

Inches	mm	ASME Class	Lb.	Kg.	Part Number
LOCK-O-RING® Plugs					
4-16	100-400	600	3.5	1.6	05-0075-0000
LOCK-O-RING® Plus Plugs					
4-6	100-150	600	4.5	2	12308409
		900	4.5	2	12308306
8-16	200-400	600	11	5	12309011



760 Tapping Machine Model 760C

Standard Cutters & Pilot Drills

Nominal Tap Size		Actual Tap Size		Cutters			Pilot Drills			Spare U-Rods
Inches	mm	Inches	mm	Wt./Lb.	Wt./Kg.	Part Number	Wt./Lb.	Wt./Kg.	Part Number	Part Number
3	80	2-7/16	67	1	0.5	05-0001-0001	1/2	0.2	05-0293-0001	00-1424-0012
4	100	3-7/16	87.3	2	0.9	05-0328-0004	1/2	0.2	05-0293-0008	00-1424-0012
6	150	5-15/32	138.9	5-3/4	3	05-0328-0006	2	0.9	05-0293-0002	00-1424-0003
8	200	7-5/16	185.8	14-1/2	7	05-0328-0008	2	0.9	05-0293-0003	00-1424-0003
10	250	9-1/2	241.3	22-1/2	10	05-0328-0010	2	0.9	05-0293-0004	00-1424-0003
12	300	11-1/2	292.1	36	16	05-0389-0012	2-1/2	1.0	05-0293-0005	00-1424-0008
14	350	12-3/4	323.9	42	19	05-0389-0014	5-1/2	2.5	05-0293-0006	00-1424-0008
16	400	14-11/16	373.1	61	28	05-0389-0016	6	2.7	05-0293-0007	00-1424-0008

SHORTSTOPP® Cutters & Pilot Drills


Nominal Tap Size		Actual Tap Size		Cutters			Pilot Drills			Spare U-Rods
Inches	mm	Inches	mm	Wt./Lb.	Wt./Kg.	Part Number	Wt./Lb.	Wt./Kg.	Part Number	Part Number
4	100	3-7/8	98.4	3-1/4	1	05-0330-0004	1/2	0.2	05-0293-0008	00-1424-0012
6	150	5-7/8	149.2	8-3/4	3	05-0330-0006	2	0.9	05-0293-0002	00-1424-0003
8	200	7-3/4	196.9	20	9	05-0330-0008	2	0.9	05-0293-0003	00-1424-0003
10	250	9-3/4	247.7	23	10	05-0330-0010	2	0.9	05-0293-0004	00-1424-0003
12	300	11-3/4	298.5	40	18	05-0330-0012	2-1/2	1.0	05-0293-0005	00-1424-0003

STOPPLE® Cutters & Pilot Drills

Nominal Tap Size		Actual T-ap Size		Cutters			Pilot Drills			Spare U-Rods
Inches	mm	Inches	mm	Wt./Lb.	Wt./Kg.	Part Number	Wt./Lb.	Wt./Kg.	Part Number	Part Number
4	100	3-15/16	100	3-1/2	2	05-0329-0004	1/2	0.2	05-0293-0008	00-1424-0012
6	150	5-15/16	150.8	9	4	05-0329-0006	2	0.9	05-0293-0002	00-1424-0003
8	200	7-7/8	200	16	7	05-0329-0008	2	0.9	05-0293-0003	00-1424-0003
10	250	9-7/8	250.8	27	12	05-0329-0010	2	0.9	05-0293-0004	00-1424-0003
12	300	11-13/16	300.1	40-1/2	18	05-0388-0012	2-1/2	1	05-0293-0005	00-1424-0008
14	350	13-1/16	331.8	49	22	05-0388-0014	5-1/2	2.5	05-0293-0006	00-1424-0008
16	400	15-1/16	382.6	64	29	05-0388-0016	6	2.7	05-0293-0007	00-1424-0008

■ Split-frame Feature

The frame assembly is split at the lower end, so that the lower section can be unbolted and removed over the drive tube and boring bar, and the packing replaced.

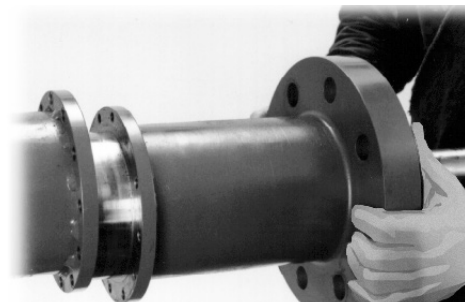



760 Tapping Machine Model 760C

Recommended Power Options for Tapping Size-On-Size

Feed Rate	Cutter Size							
	3"	4"	6"	8"	10"	12"	14"	16"
(0.0057/REV) AIR/HYD	A	A	A	A	A	A		
	B	B	B	B	B			
	C	C	C	C				
	D	D	D	D				
	E	E	E	E				
	F	F	F	F				
(0.0057/REV) TANDEM HYD with Flywheel	A	A	A	A	A	A	A	
	B	B	B	B	B	B	B	
	C	C	C	C	C	C		
	D	D	D	D	D	D		
	E	E	E	E	E	E		
	F	F	F	F	F	F		
(0.0037/REV) AIR/HYD	A	A	A	A	A	A	A	
	B	B	B	B	B	B		
	C	C	C	C	C			
	D	D	D	D	D			
	E	E	E	E	E			
	F	F	F	F	F			
(0.0037/REV) TANDEM HYD with Flywheel	A	A	A	A	A	A	A	A
	B	B	B	B	B	B	B	
	C	C	C	C	C	C	C	
	D	D	D	D	D	D	D	
	E	E	E	E	E	E	E	
	F	F	F	F	F	F	F	

- The following letters represent:
 - A = Carbon steel pipe SMYS (Specified Minimum Yield Strength) 30,000 to 50,000 psi maximum, tensile strength of 70,000 psi.
 - B = Carbon steel pipe SMYS 50,000 to 70,000 psi maximum, tensile strength of 90,000 psi.
 - C = Cast iron pipe. Cutting characteristics vary widely; hard to predict.
 - D = Chrome-moly, high temperature, steel pipe.
 - E = 300 series stainless steel pipe.
 - F = Flat-plate cuts using special cutters on the materials listed above (refer to Notes 3 and 4). Pilot drill must be through before cutter tooth engages material.
- The dual hydraulic drive features an ability to shift from high speed/low torque to low speed/high torque when tapping the larger diameter pipes and/or the more difficult cutting steels.
- The table for selecting power options (above) is based on the latest TDW designs and past experience. The data should be used as a guideline. There have been, and will be, conditions which will not strictly follow the guidelines.
- Special cutters are available for flat plates, stainless steel pipe, cast iron pipe and other special conditions.
- When tapping a larger pipe or tank, the cutter will sometimes go through the flat-plate condition. For example, all teeth are cutting at the same time. This is the most power-consuming condition possible and special cutters may be required. Considering cutter size, diameter of cylinder, wall thickness, feed rates, different materials of construction, etc., there are many possibilities. The following table gives some examples of flat-plate conditions. Any pipe or tank with wall thicknesses greater than those shown will also be considered flat-plate.

Cutter Size	Nom. Pipe x Wall	Nom. Pipe x Wall	Nom. Pipe x Wall	Cutter Size	Nom. Pipe x Wall	Nom. Pipe x Wall	Nom. Pipe x Wall
3"	4" x .359"	6" x .232"	8" x .176"	10"	24" x .980"	30" x .772"	48" x .475"
4"	6" x .481"	8" x .357"	10" x .282"	12"	36" x .943"	48" x .699"	60" x .556"
6"	10" x .748"	12" x .616"	14" x .556"	14"	48" x .862"	60" x .685"	72" x .569"
8"	18" x .776"	20" x .692"	24" x .571"	16"	56" x .980"	60" x .913"	72" x .757"