



# SHORTSTOPP® 3-WAY™ Tee

Sizes: 1-1/4- to 12-inch



T.D. Williamson

Bulletin No: 2100.002.05

Version: 12.2022

Supersedes :2100.002.04(10.2021)



■ **Threaded 3-WAY Tee Fitting**  
Sizes: 1-1/4 to 3-inch



■ **Flanged 3-WAY Tee Fitting**  
Sizes: 4- to 12-inch

## Description

TDW's 3-WAY™ Tee is designed for use with the TDW SHORTSTOPP® Plugging Machine Systems. It is used for main relocations, equipment tie-ins, lateral connections, line extensions and for making crossovers, all without shutdown.

The design of the 4-inch (DN 100) to 12-inch (DN 300) Type IIA 3-WAY Tee requires a reusable bolt-on flange adapter which adapts the tee to TDW SHORTCUTT® and SHORTSTOPP Valves.


When used with SHORTSTOPP Plugging Machines, the maximum recommended working pressure and temperature should be limited to that of the plugging equipment, but not exceeding that of the fitting itself.

## Features

All fittings are compatible with most ASME Class 150 applications. With the plugging equipment removed, the maximum working pressure is 285 psi (20 bar) at 100°F (38°C) or 245 psi (17 bar) at 180°F (82°C) per ASME B31.4. See chart on page 2 for MAOP per ASME B31.8.

Sizes 1-1/4" (DN 32) and 2" (DN 50) tees are forged ASTM A-105. Size 3" (DN 80) tees are ASTM A-234 Grade WPB steel. Sizes 4" through 12" (DN 100 - 300) tees are either fabricated from ASTM A-106 Grade B or ASTM A-234 Grade WPB steel.

## ■ Typical Plugging Setup

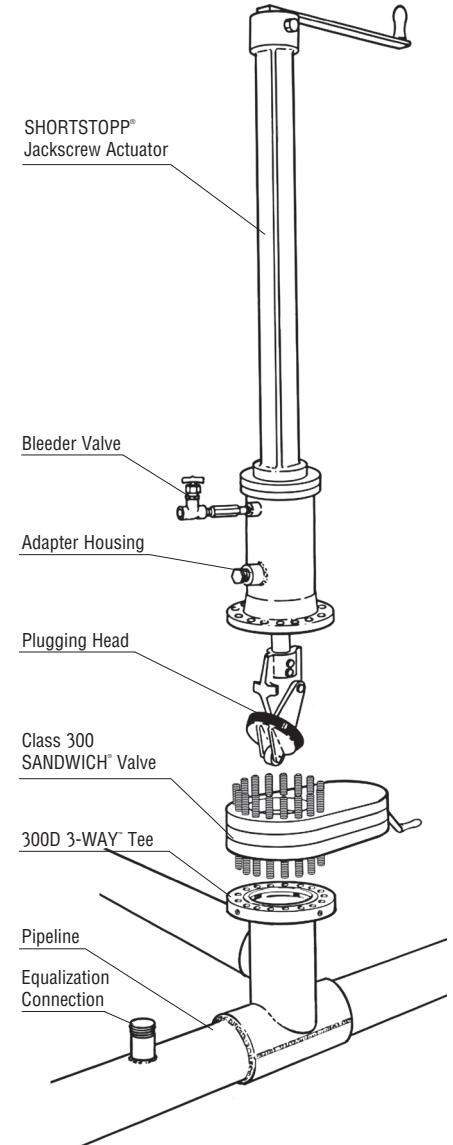



# SHORTSTOPP® 3-WAY™ Tee

## 3-WAY™ Tee for SHORTSTOPP® 275 and PROSTOPP DS™

The 3-WAY Tee 1-1/4" to 3" includes: cap, completion plug, O-ring and tee.

The 3-WAY Tee 4" to 12" includes: cover flange with gasket, bolts and plastic cap plugs, completion plug, O-Ring and tee.

Size	Maximum allowable operating pressure (in psi) per ASME B31.8 at -20 to +100° F								Part Number
	Inches	DN	Weight		Design Factor				
			Lbs.	Kg.	0.72	0.60	0.50	0.40	
1-1/4	32		4	2	285	285	285	285	06-6741-0000-00
1-1/2	38		4.5	2	285	285	285	285	26-0216-0000-00
2	50		5.5	2.5	285	285	285	285	26-0217-0000-00
3	80		11	5	285	285	285	285	26-0218-0000-00
4	100		36	16	285	285	285	285	06-7218-0000-00
6	150		51	23	285	285	285	285	06-7219-0000-00
8	200		92	42	285	285	285	285	06-7220-0000-00
10	250		162	74	285	285	285	225	06-7221-0000-00
12	300		240	109	285	265	220	175	06-7222-0000-00
3 x 4	80 x 100		11	5	285	285	285	285	26-0325-0304-01
4 x 6	100 x 150		35	16	285	285	285	285	06-7239-0406-01
6 x 8	150 x 200		50	23	285	285	285	285	06-7240-0608-01
8 x 10	200 x 250		125	57	285	285	285	285	06-7241-0810-01
8 x 12	200 x 300		125	57	285	285	285	285	06-7241-0812-01

### Minimum Pipe Wall Thickness (Inches)

Size	Header Pipe OD	Design Factor Min. Pipe Wall Thickness			
		.072	0.60	0.50	0.40
1-1/4	1.660	0.019	0.023	0.027	0.034
1-1/2	1.900	0.021	0.026	0.031	0.039
2	2.375	0.027	0.032	0.039	0.048
3	3.500	0.040	0.048	0.057	0.071
4	4.500	0.051	0.061	0.073	0.092
6	6.625	0.075	0.090	0.108	0.135
8	8.625	0.098	0.177	0.140	0.176
10	10.750	0.122	0.146	0.175	0.219
12	12.750	0.144	0.173	0.208	0.260
3 x 4	4.500	0.051	0.061	0.073	0.092
4 x 6	6.625	0.075	0.090	0.108	0.135
6 x 8	8.625	0.098	0.117	0.140	0.176
8 x 10	10.750	0.122	0.146	0.175	0.219
8 x 12	12.750	0.144	0.173	0.208	0.260

### Spare O-Rings & Gaskets

Size	DN	Spare O-Rings Part Number	Spare Gaskets Part Number
1-1/4	32	00-0117-0014	--
1-1/2	38	00-0117-0010	--
2	50	00-0117-0010	--
3	80	00-0017-0013	--
4	100	00-1250-0001	00-5238-0004-01
6	150	00-1250-0002	00-5238-0006-01
8	200	00-1250-0003	00-5238-0008-01
10	250	00-1250-0004	00-5238-0010-01
12	300	00-1250-0005	00-5238-0012-01
3 x 4	80 x 100	00-0017-0013	--
4 x 6	100 x 150	00-1250-0001	00-5238-0004-01
6 x 8	150 x 200	00-1250-0002	00-5238-0006-01
8 x 10	200 x 250	00-1250-0003	00-5238-0008-01
8 x 12	200 x 300	00-1250-0003	00-5238-0008-01

Note: The TDW fitting provides sufficient material thickness for itself and in many cases reinforcement for the branch opening in the pipe. However, the chart above specifies minimum wall thickness of the pipe for self reinforcement. (Based on 35,000 PSI SMYS)

# SHORTSTOPP® 3-WAY™ Tee

## Valve-to-Fitting Adapters 4- to 12-inch

The 4" x 6", 6" x 8" and 10" x 12" adapters are used to adapt the valve to the next size smaller fittings.


Inches	DN	Lbs.	Kg.	Part Number
4	100	10	5	06-5724-0001
6	150	13	6	06-5724-0002
8	200	25	11	06-5724-0003
10	250	40	18	06-5724-0010
12	300	55	25	06-5724-0011
4 x 6	100 x 150	18	8	06-5724-0007
6 x 8	150 x 200	28.5	13	06-5724-0004
10 x 12	250 x 300	70	32	06-5724-0012

## Dimensions


Size		A		B	
Inches	DN	Inches	mm	Inches	mm
1-1/4	32	4-3/4	121	2-5/8	67
1-1/2	38	6-5/16	160	2-9/16	65
2	50	5-1/4	133	3-1/4	83
3	80	7-3/16	183	4-3/4	121
4	100	9-13/16	249	6-3/4	171
6	150	13-1/4	338	8-13/16	224
8	200	14-13/16	376	10-3/4	273
10	250	19	483	14-7/8	378
12	300	21-1/2	546	17-3/8	441
3 x 4	80 x 100	7-3/16	183	4-3/4	121
4 x 6	100 x 150	9-13/16	249	6-3/4	171
6 x 8	150 x 200	13-5/16	338	8-13/16	224
8 x 10	200 x 250	14-13/16	376	10-3/4	273
8 x 12	200 x 300	19	483	14-7/8	378



■ Valve-to-Fitting Adapter

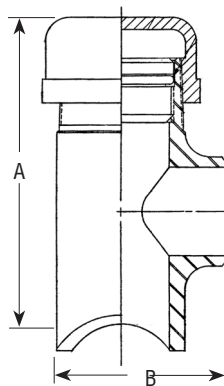

■ Sizes: 1-1/4" to 3"

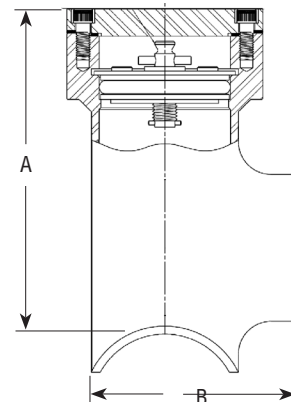

■ Sizes: 4" to 12"

