

SHORTSTOPP® II 1-1/4-inch Plugging Machine




MAOP up to 200 psi at 100°F

Data Sheet No. **SSII-1-1/4**

Date: January 2025

(see chart below for nosepiece and sealing element pressure rating)


Tapping

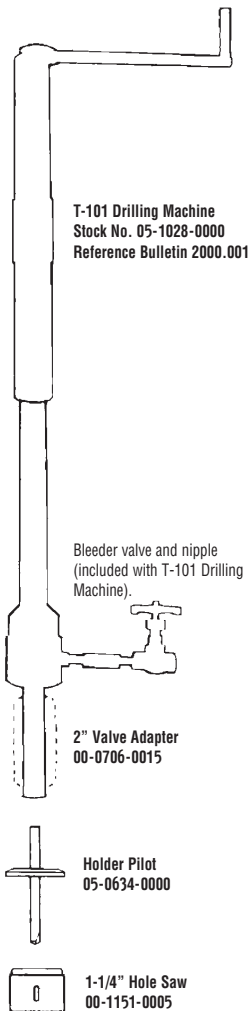

Plugging


1-1/4" Plugging Machine Assembly 08-3303-0000

Includes items below

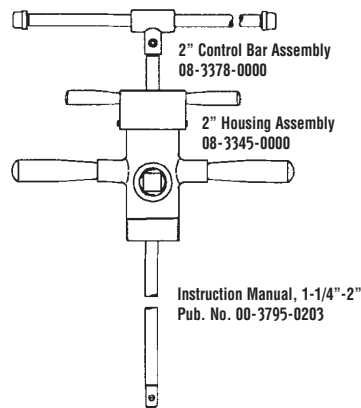

1-1/4" Plugging Head Assembly 08-3302-0000


Includes items below

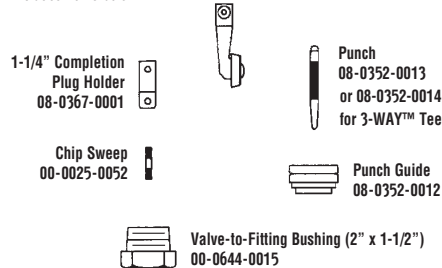

Sealing Element Not Included (Note 5)

Bleeder Valve Accessory

Purchased separately



Carrying case for plugging machine
sold separately 08-2481-0006

2" SHORTCUTT® 500 Valve
09-0758-0000
500 psi MWP



1-1/4" 3-WAY™ Tee
06-6741-0000 (Note 4)

1-1/4" Welding Fitting
06-1179-0000 (Note 4)



Refer to back for
fitting options.

1-1/4" Steel Pipe

- Maximum Working Pressure:** 200 psi at 100°F (May be limited by valve selection.)
- Maximum Working Temperature:** 180°F at 120 psi.
- Bleeder valve and nipple** are provided with TDW Drilling Machines.
- Fitting** - Includes threaded completion plug and cap.
- Sealing Elements** - Refer to chart at right.

Pipe ID	Part No.
1.312-1.380	08-0114-0125-00
1.250-1.311	08-0114-0125-01

Consult factory for unlisted pipe ID.



Data Sheet No. **SSII-1-1/4**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine***
1-1/4-inch Gas Main



■ **Welding Fitting**
See Bulletin 2100.003



■ **3-WAY™ Tee**
See Bulletin 2100.002

■ **Note:** Consult your TDW representative for additional fitting options.

SHORTSTOPP® II 1-1/2-inch Plugging Machine




MAOP up to 200 psi at 100°F

Data Sheet No. **SSII-1-1/4**

Date: January 2026

(see chart below for nosepiece and sealing element pressure rating)


Tapping

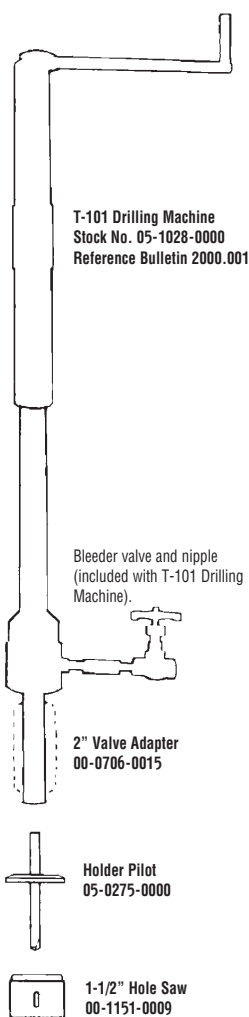

Plugging


1-1/2" Plugging Machine Assembly 08-3305-0000

Includes items below

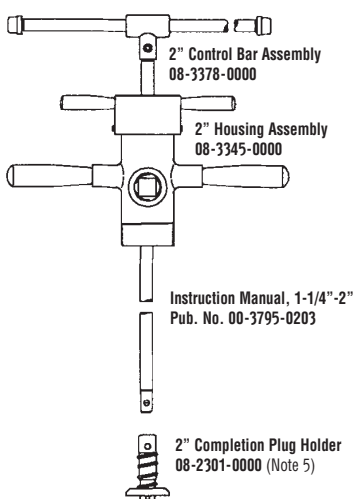

1-1/2" Plugging Head Assembly 08-3304-0000


Includes items below

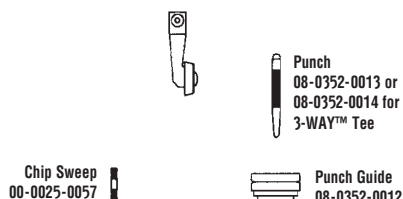

Sealing Element Not Included (Note 6)


Bleeder Valve Accessory

Purchased separately



Carrying case for plugging machine
sold separately 08-2481-0006

2" SHORTCUTT® 500 Valve
09-0758-0000
500 psi MWP



Refer to back for
fitting options.

- Maximum Working Pressure:** 200 psi at 100°F (May be limited by valve selection.)
- Maximum Working Temperature:** 180°F at 120 psi.
- Bleeder valve and nipple** are provided with TDW Drilling Machines.
- Fitting** - Includes threaded completion plug and cap.
- Solid Completion Plug Holder** - 08-0367-0001
- Sealing Elements** - Refer to chart at right.

Pipe ID	Part No.
1.562-1.630	08-0114-0015-00
1.500-1.561	08-0114-0015-01

Consult factory for unlisted pipe ID.



Data Sheet No. **SSII-1-1/2**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** 1-1/2-inch Gas Main



■ **Welding Fitting**
See Bulletin 2100.003



■ **Spherical 3-WAY™ Tee**
See Bulletin 2100.007



■ **3-WAY™ Tee**
See Bulletin 2100.002

■ **Note:** Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 2-inch Plugging Machine




MAOP up to 200 psi at 100°F

Data Sheet No. **SSII-1-1/4**

Date: January 2026

(see chart below for nosepiece and sealing element pressure rating)


Tapping

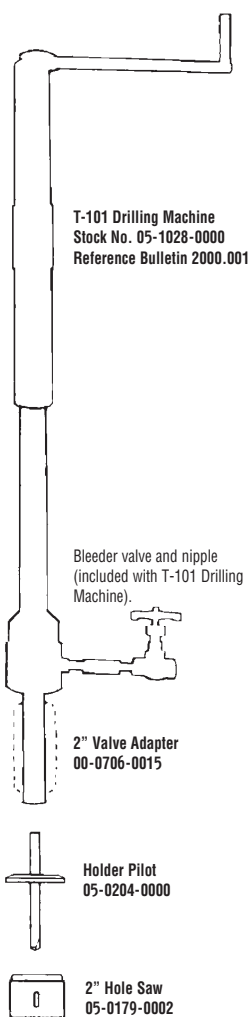

Plugging

2" Plugging Machine Assembly 08-3309-0000

Includes items below

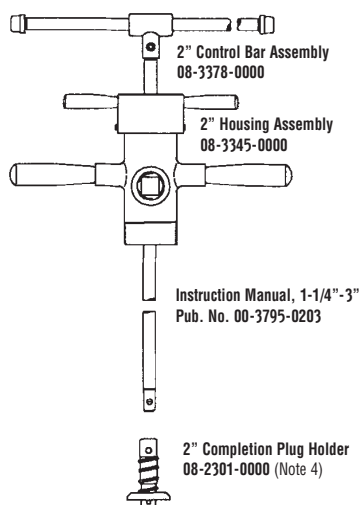

2" Standard Plugging Head Assembly 08-3306-0000


Includes items below



Sealing Element Not Included (Note 5)


Bleeder Valve Accessory

Purchased separately



Carrying case for plugging machine
sold separately 08-2481-0006

2" SHORTCUTT® Valve
09-0758-0000
500 psi MWP



2" Steel Pipe

Refer to back for
fitting options.

- Maximum Working Pressure and Temperature:** 60 psi at 180°F with standard plugging head components; with special cups, 200 psi at 100°F or 120 psi at 180°F (see chart at right). Pressure rating may be limited by valve selection.
- Bleeder valve and nipple** are provided with TDW Drilling Machines.
- Fitting** - Includes threaded completion plug and cap.
- Solid Completion Plug Holder** - 08-0367-0001.
- Sealing Elements** - Refer to chart at right.

60 psi MWP Pipe ID	60 psi MWP Part No.	200 psi MWP Pipe ID	200 psi MWP Part No.
2.126-2.157	08-0501-0200-00	2.062-2.157	08-3427-0002-00
2.062-2.125	08-0114-0002-00	2.000-2.061	08-3427-0002-01
2.000-2.061	08-0114-0002-01	1.938-1.999	08-3427-0002-02
1.939-1.999	08-0114-0002-02		

Consult factory for unlisted pipe ID.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson



Data Sheet No. **SSII-2**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** **2-inch Gas Main**



■ **Welding Fitting**
See Bulletin 2100.003




■ **Spherical 3-WAY™ Tee**
See Bulletin 2100.007




■ **3-WAY™ Tee**
See Bulletin 2100.002



■ **Mechanical SHORTSLEEVE™ Fitting**
See Bulletin 2100.002

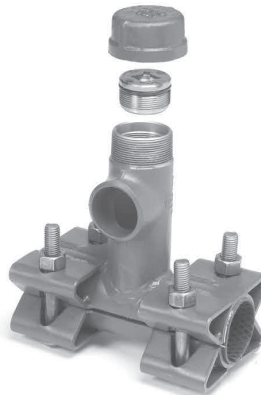

■ **Branch Type II 3-WAY™ Tee**
See Bulletin 2100.011

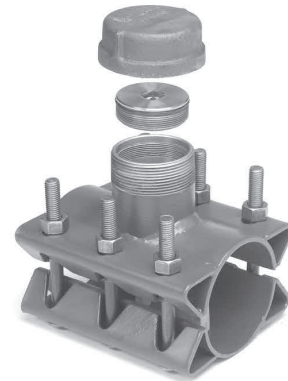

■ **Branch Type II Plugging Fitting**
See Bulletin 2100.010

■ **Note:** Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 3-inch Size-on-Size Plugging Machine

(1-inch Dia. Control Bar)

MAOP up to 200 psi at 100°F


(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. SSII-1-1/4

Date: January 2026


Tapping

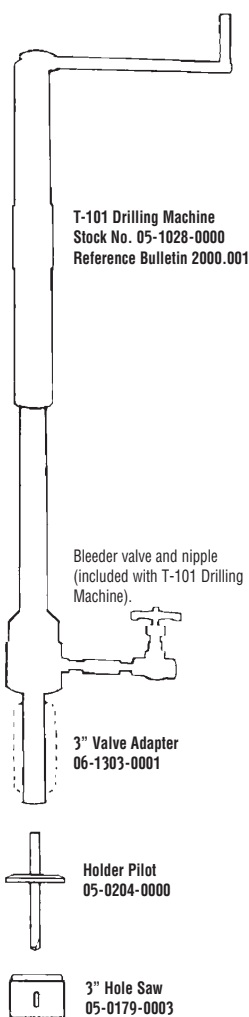

Plugging

3" Plugging Machine Assembly 08-3500-0300

Includes items below

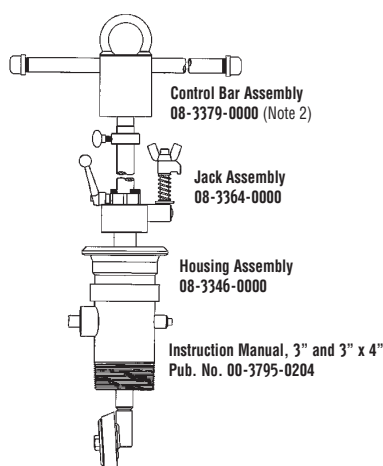

Standard Plugging Head Assembly 08-3314-0000


Includes items below



Sealing Element Not Included (Note 6)

Bleeder Valve Accessory

Purchased separately




3" Sight Glass Kit 08-3423-0000-03

See Sight Glass Data Sheet for details

Carrying case for plugging machine
sold separately 08-2481-0005

SHORTCUTT® Valve
09-0759-0000
500 psi MWP



3-WAY™ Tee
26-0218-0000-00 (Note 4)

SHORTSTOPP® Welding Fitting
26-0213-0000-00 (Note 4)



3" Steel Pipe

Refer to back for fitting options.

1. **Maximum Working Pressure and Temperature:** 60 psi at 180°F with standard plugging head components; with special cups, 200 psi at 100°F or 120 psi at 180°F (see chart at right). Pressure rating may be limited by valve selection.
2. **3" x 4" Control Bar Assembly** may be used with 3" Plugging Head Control Bar Adapter 08-3421-0002 for plugging 3" pipe.
3. **Bleeder valve and nipple** are provided with

- TDW Drilling Machines.
4. **Fitting** - Includes threaded completion plug and cap.
 5. **Solid Completion Plug Holder** - 08-3393-000.
 6. **Sealing Elements** - Refer to chart at right.

60 psi MWP Pipe ID	60 psi MWP Part No.	200 psi MWP Pipe ID	200 psi MWP Part No.
3.188-3.260	08-0502-0003-00	3.250-3.312	08-3428-0003-00
3.062-3.188	08-0114-0003-00	3.062-3.125	08-3427-0003-00
2.875-2.937	08-0114-0003-03	2.875-2.937	08-3427-0003-03

Consult factory for unlisted pipe ID.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson



Data Sheet No. **SSII-3**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** **3-inch Gas Main**




■ **Welding Fitting**
See Bulletin 2100.003




■ **Spherical 3-WAY™ Tee**
See Bulletin 2100.007



■ **3-WAY™ Tee**
See Bulletin 2100.002

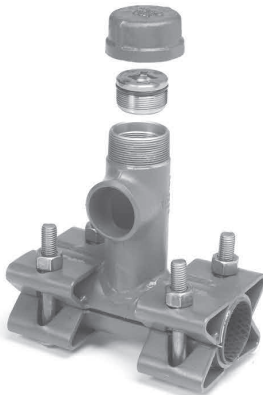

■ **Branch Type II 3-WAY™ Tee**
See Bulletin 2100.011

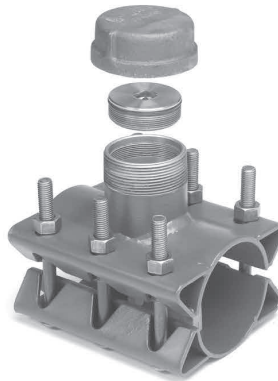

■ **Branch Type II Plugging Fitting**
See Bulletin 2100.010

■ **Note:** Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 4-inch Size-on-Size Plugging Machine

(1-inch Dia. Control Bar)



MAOP up to 200 psi at 100°F


Data Sheet No. SSII-1-1/4

Date: January 2026

(see chart below for nosepiece and sealing element pressure rating)

Tapping


- Note: Either the T-101 or T-203 Tapping Machine is recommended for 4" taps.

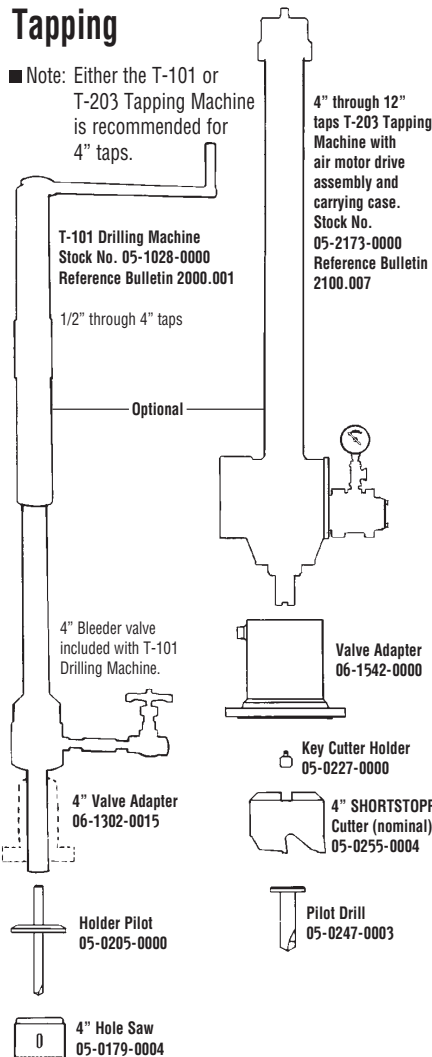

Plugging


4" Plugging Machine Assembly 08-3500-0400

Includes items below

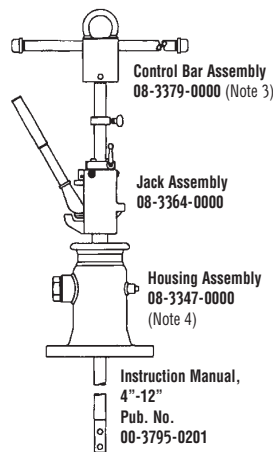

Standard Plugging Head Assembly 08-3316-0000



Includes items below



Sealing Element Not Included (Note 7)


Bleeder Valve Accessory

Purchased separately



Sight Glass Kit 08-3424-0000-01 (Note 2)

See Sight Glass Data Sheet for details

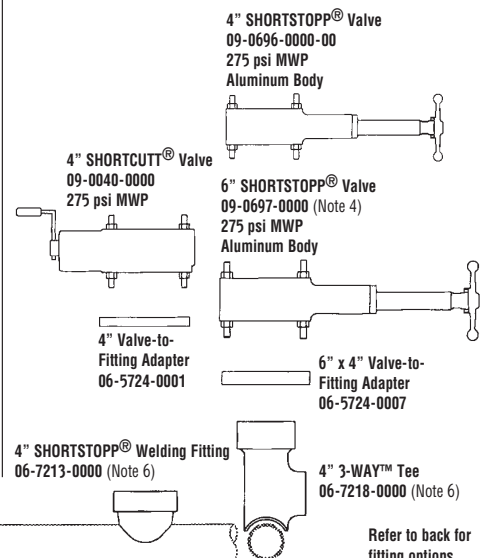

- Maximum Working Pressure and Temperature:** 60 psi at 180°F with standard plugging head components; 200 psi at 100°F or 120 psi at 180°F, with special cups/nosepieces (see chart at right).
- Sight Glass Kit** - Requires the use of a T-203 Tapping Adapter. 4" Part No. 06-1542-0000 6" Part No. 06-1543-0000.
- 3" x 4" Control Bar Assembly** may also be used 08-3386-0000.
- If using a 6" **SHORTCUTT®** or **SHORTSTOPP®** Valve, use 4-6 PE Housing Assembly 08-3357-0000 and use 6" x 4" Tapping Adapter (I/T-101) 06-8872-0005.
- Bleeder valve and nipple** are provided with TDW Drilling Machines.
- Fitting** - Leaf-type completion plug and blind flange included.
- Sealing Elements** - Refer to chart at right. Use 08-3428-0004-03 to plug 4" 3-way tee outlet.
- * Thinwall/ ** Standard

Pipe ID	60 psi MWP Sealing Element	60 psi MWP Nosepiece	Pipe ID	200 psi MWP Sealing Element	200 psi MWP Nosepiece
4.250-4.260	08-0502-0004-00*	08-3316-1502	4.156-4.260	08-3428-0004-01	08-3316-1502*
4.125-4.187	08-0502-0004-02*	08-3316-1502	4.062-4.156	08-3428-0004-02	08-3316-1502*
4.000-4.062	08-0114-0004-00**	08-3316-0002	3.962-4.125	08-3428-0004-03	08-3316-1502*
3.812-3.874	08-0114-0004-03**	08-3316-0002	3.875-3.937	08-3427-0004-02	08-3316-0002**
Consult factory for unlisted pipe ID.			3.812-3.874	08-3427-0004-03	08-3316-0002**


North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson



Data Sheet No. **SSII-4**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** 4-inch Gas Main

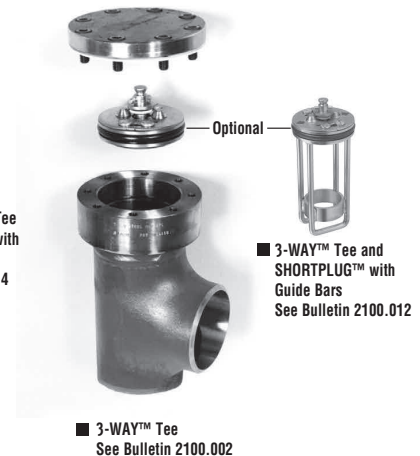

■ Note: Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 6" Size-on-Size Plugging Machine

(1-5/8" Dia. Control Bar)

MAOP up to 200 psi at 100°F

(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. SSII-1-1/4

Date: January 2026

Tapping

■ Note: T-203 Tapping Machine is recommended for 6" taps.


4" through 12" taps T-203 Tapping Machine with air motor drive assembly and carrying case.
Stock No. 05-2173-0000
Reference Bulletin 2100.007.00

Valve Adapter
06-1543-0000

Cutter Holder
05-0326-0000

6" SHORTSTOPP®
Cutter (nominal)
05-0330-0006


6" Pilot Drill
05-0293-0002

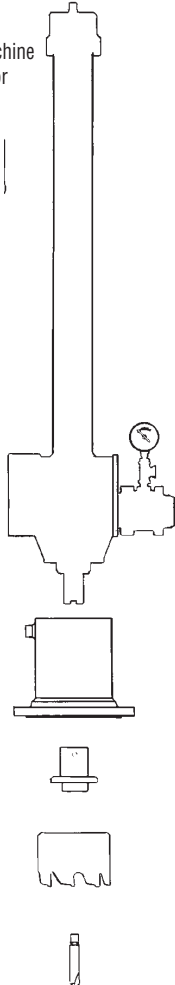

Plugging

6" Plugging Machine Assembly 08-3500-0600

Includes items below

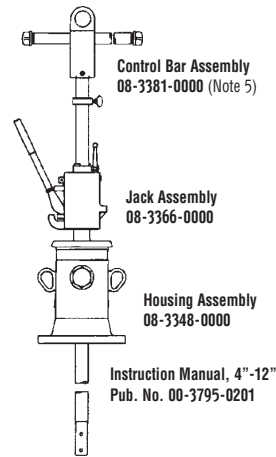


Standard Plugging Head Assembly 08-3318-0000

Includes items below

Nosepiece
08-3318-0002 and
08-3318-1502 (Note 6)

Chip Sweep
00-1289-0002

Sealing Element Not Included (Note 6)



Bleeder Valve Accessory

Purchased separately

1/4" Bleeder Valve
00-0774-0001


Nipple
00-0220-0001 (Note 3)

6"-8" Completion Plug Holder
08-3396-0000

6-inch Spool Adapter
06-1165-0177
Required to set 6-inch
SHORTPLUG™ with
Guide Bars in all
SHORTSTOPP Type II
fittings.

Sight Glass Kit 08-3424-0000-02 (Note 2)

See Sight Glass Data Sheet for details

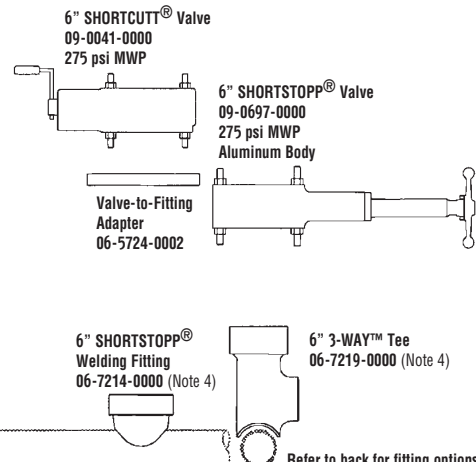

1. **Maximum Working Pressure and Temperature:** 60 psi at 180°F with standard plugging head components; 200 psi at 100°F or 120 psi at 180°F, with special cups/nosepieces (see chart at right).
2. **Sight Glass Kit** - Requires the use of the 6" T-203 Tapping Adapter. Part No. 06-1543-0000.
3. **Bleeder valve and nipple** are provided with TDW Drilling Machines.
4. **Fitting** - Leaf-type completion plug and blind flange included.
5. 6" x 8" **Control Bar Assembly** 08-3388-0000 may also be used.
6. **Sealing Elements** - Refer to chart at right.
7. * Thinwall/ ** Standard

Pipe ID	60 psi MWP Sealing Element	60 psi MWP Nosepiece	Pipe ID	200 psi MWP Sealing Element	200 psi MWP Nosepiece
6.250-6.311	08-0502-0006-01	08-3318-0002*	6.250-6.311	08-3428-0006-01	08-3318-1502*
6.188-6.249	08-0502-0006-02	08-3318-0002*	6.187-6.249	08-3428-0006-02	08-3318-1502*
6.062-6.310	08-0114-0006-00	08-3318-0002**	6.062-6.124	08-3428-0006-04	08-3318-1502*
5.750-5.811	08-0114-0006-04	08-3318-0002**	5.750-5.811	08-3427-0006-04	08-3318-0002**

Consult factory for unlisted pipe ID.


North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson






Data Sheet No. **SSII-6**

Fittings **Tapping and SHORTSTOPP® II Plugging Machine** 6" Gas Main

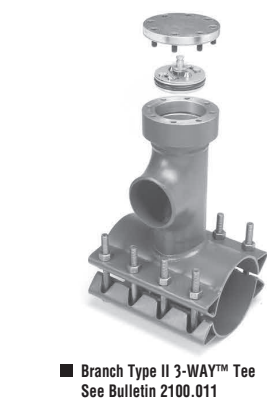

■ Note: If you already have 8" SHORTSTOPP® plugging equipment, the additional accessories shown below are all you need to plug 6" mains (plus Welding Fittings).

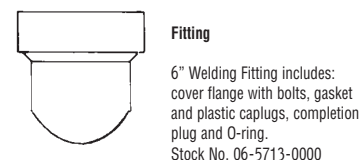

■ Note: Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 8" Size-on-Size Plugging Machine

(1-5/8" Dia. Control Bar)

MAOP up to 150 psi at 100°F


(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. SSII-1-1/4

Date: January 2026


Tapping

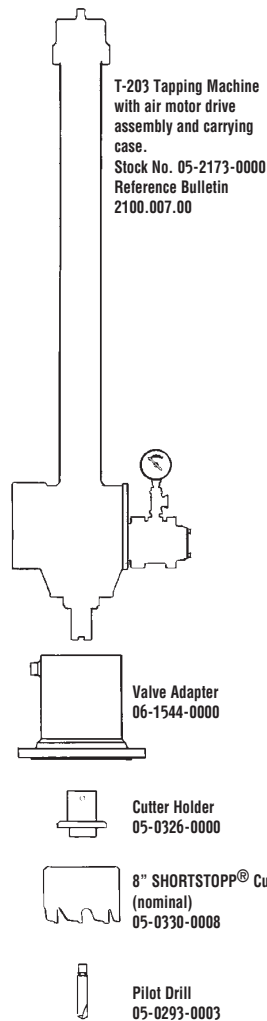

Plugging


8" Plugging Machine Assembly 08-3500-0800

Includes items below

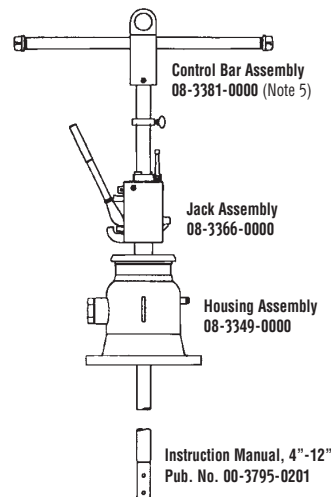


Standard Plugging Head Assembly 08-3320-0000

Includes items below




Bleeder Valve Accessory

Purchased separately

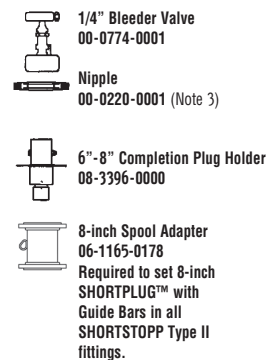

Sight Glass Kit 08-3424-0000-02 (Note 2)

See Sight Glass Data Sheet for details

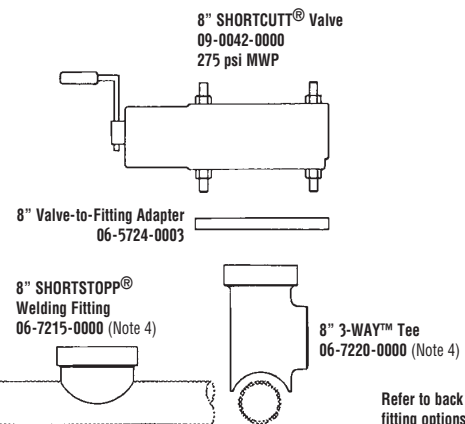

8" Steel Pipe

Refer to back for fitting options.

1. **Maximum Working Pressure and Temperature:** 60 psi at 180°F with standard plugging head components; 150 psi at 100°F or 120 psi at 180°F, with special cups/nosepieces (see chart at right).
2. **Sight Glass Kit** - Requires the use of the 8" T-203 Tapping Adapter. Part No. 06-1544-0000.
3. **Bleeder valve and nipple** are provided with TDW Drilling Machines.
4. **Fitting** - Leaf-type completion plug and blind flange included.
5. **6" x 8" Control Bar Assembly** may also be used.
6. **Sealing Elements** - Refer to chart at right.
7. * Thinwall/ ** Standard

Pipe ID	60 psi MWP Sealing Element	60 psi MWP Nosepiece	Pipe ID	150 psi MWP Sealing Element	150 psi MWP Nosepiece
8.250-8.280	08-1719-0008-01	08-3320-0002*	8.281-8.311	08-3428-0008-01	08-3320-1502*
8.188-8.249	08-1719-0008-02	08-3320-0002*	8.250-8.280	08-3428-0008-02	08-3320-1502*
7.938-8.281	08-0114-0008-00	08-3320-0002**	7.981-8.000	08-3427-0008-00	08-3320-0002**
7.625-7.687	08-0114-0008-05	08-3320-0002**	7.625-7.687	08-3427-0008-06	08-3320-0002**

Consult factory for unlisted pipe ID.


North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2023 T.D. Williamson




Data Sheet No. **SSII-8**

Fittings *Tapping and SHORTSTOPP® II Plugging Machine* 8" Gas Main




■ Welding Fitting
See Bulletin 2100.003

■ Welding Fitting and
SHORTPLUG™ with
Guide Bars
See Bulletin 2100.013




■ Spherical 3-WAY™ Tee
See Bulletin 2100.007

■ Spherical 3-WAY™ Tee
and SHORTPLUG™ with
Guide Bars
See Bulletin 2100.014



■ 3-WAY™ Tee
See Bulletin 2100.002

■ 3-WAY™ Tee and
SHORTPLUG™ with
Guide Bars
See Bulletin 2100.012



■ Mechanical SHORTSLEEVE™ Fitting
See Bulletin 2110.001




■ Branch Type II 3-WAY™ Tee
See Bulletin 2100.011



■ Branch Type II Plugging Fitting
See Bulletin 2100.010

■ Note: If you already have 8" SHORTSTOPP® II plugging equipment, the additional accessories shown below are all that are needed to plug 6" mains (plus Welding Fittings).



6" x 8" Valve-to-Fitting Adapter
06-5724-0004



8-inch Spool Adapter
06-1165-0178
Required to set 8-inch
SHORTPLUG™ with Guide
Bars in all SHORTSTOPP Type
II fittings.




6" SHORTSTOPP® Cutter
(nominal)
05-0446-0006

Pilot Drill
05-0293-0002



Completion Plug Holder
08-3396-0000




6" Plugging Head with Sealing
Cup and Chip Sweep
08-3318-0000



Cover Flange



Completion Plug



Fitting

6" Welding Fitting includes:
cover flange with bolts, gasket
and plastic caplugs, completion
plug and O-ring.
Stock No. 06-5713-0000

■ Note: Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 10" Size-on-Size Plugging Machine

(2-1/2" Dia. Control Bar)

MAOP up to 150 psi at 100°F


(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. SSII-1-1/4

Date: January 2026


Tapping

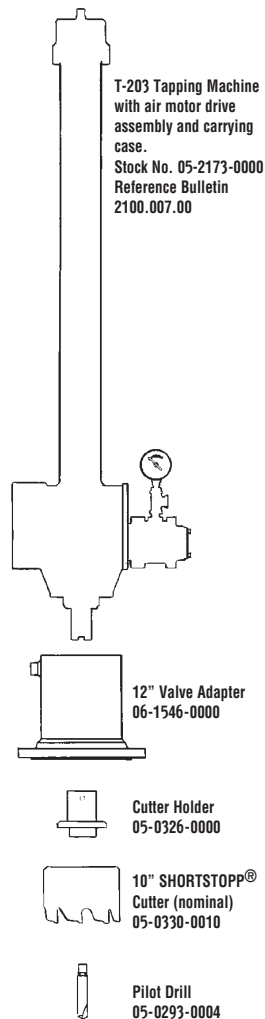

Plugging


10" Plugging Machine Assembly 08-3500-1000

Includes items below

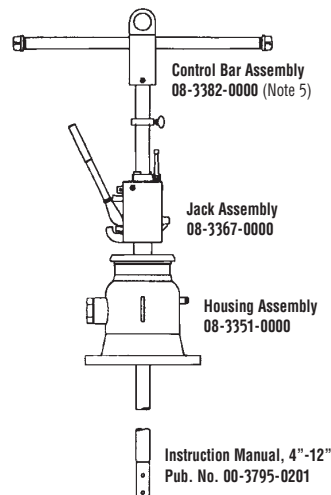


Standard Plugging Head Assembly 08-3321-0000

Includes items below




Bleeder Valve Accessory

Purchased separately

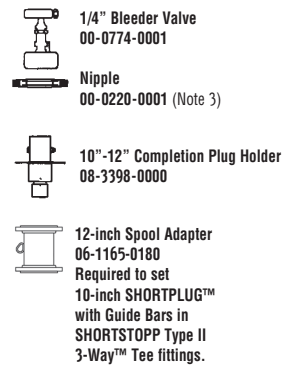

Sight Glass Kit 08-3424-0000-02 (Note 2)

See Sight Glass Data Sheet for details

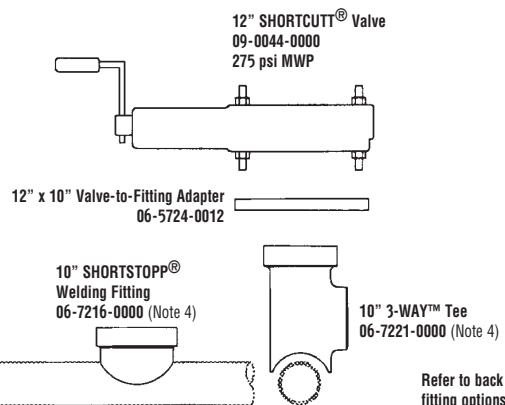

1. **Maximum Working Pressure and Temperature:** 60 psi at 180°F with standard plugging head components; 150 psi at 100°F or 120 psi at 180°F, with special cups/nosepieces (see chart at right).
2. **Sight Glass Kit** - Requires the use of the 12" T-203 Tapping Adapter. Part No. 06-1546-0000.
3. **Bleeder valve and nipple** are provided with TDW Drilling Machines.
4. **Fitting** - Leaf-type completion plug and blind flange included.
5. **8" x 12" Control Bar Assembly** Part No. 08-3389-0000 may also be used.
6. **Sealing Elements** - Refer to chart at right.
7. * Thinwall/ ** Standard

Pipe ID	60 psi MWP Sealing Element	60 psi MWP Nosepiece	Pipe ID	150 psi MWP Sealing Element	150 psi MWP Nosepiece
10.312-10.374	08-1719-0010-01	08-3321-0002*	10.312-10.374	08-3428-0010-01	08-3321-1502*
10.250-10.311	08-1719-0010-02	08-3321-0002*	10.250-10.311	08-3428-0010-02	08-3321-1502*
9.938-10.375	08-0114-0010-00	08-3321-0002**	10.000-10.062	08-3427-0010-00	08-3321-0002**
9.750-9.811	08-0114-0010-03	08-3321-0002**	9.750-9.811	08-3427-0010-04	08-3321-0002**

Consult factory for unlisted pipe ID.



North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Date subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson






Data Sheet No. **SSII-10**

Fittings *Tapping and SHORTSTOPP® II Plugging Machine* 10" Gas Main

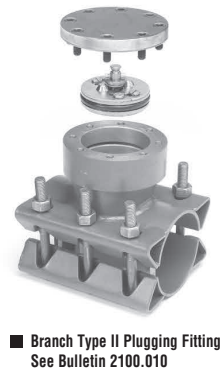

■ Note: If you already have 12" SHORTSTOPP® II plugging equipment, the additional accessories shown below are all that are needed to plug 10" mains (plus Welding Fittings).



10" SHORTCUTT® Valve not available. The 10" SHORTSTOPP® II Plugging Machine is equipped with 12" housing for use with 12" SHORTCUTT® Valve and 10" x 12" adapter.

■ Note: Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 12" Size-on-Size Plugging Machine

(2-1/2" Dia. Control Bar)

MAOP up to 150 psi at 100°F


(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. SSII-1-1/4

Date: January 2026


Tapping

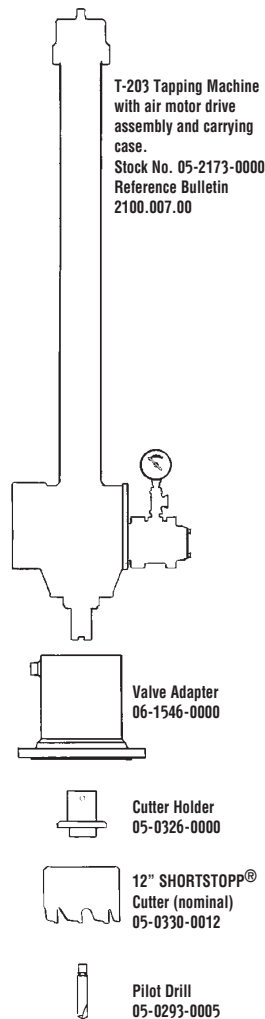

Plugging


12" Plugging Machine Assembly 08-3500-1200

Includes items below

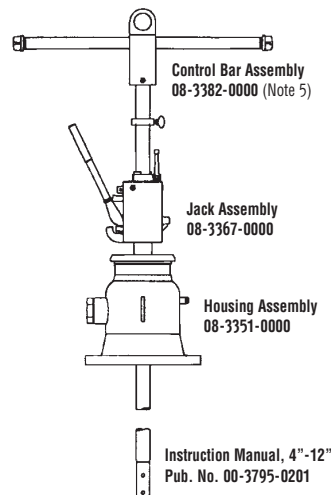


Standard Plugging Head Assembly 08-3322-0000

Includes items below




Bleeder Valve Accessory

Purchased separately

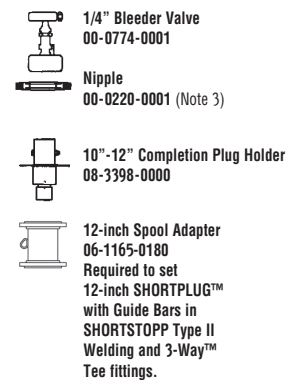

Sight Glass Kit 08-3424-0000-02 (Note 2)

See Sight Glass Data Sheet for details

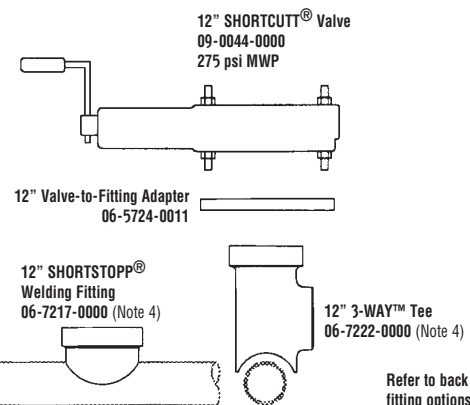

1. **Maximum Working Pressure and Temperature:** 60 psi at 180°F with standard plugging head components; 150 psi at 100°F or 120 psi at 180°F, with special cups/nosepieces (see chart at right).
2. **Sight Glass Kit** - Requires the use of the 12" T-203 Tapping Adapter. Part No. 06-1546-0000.
3. **Bleeder valve and nipple** are provided with TDW Drilling Machines.
4. **Fitting** - Leaf-type completion plug and blind flange included.
5. **8" x 12" Control Bar Assembly** Part No. 08-3389-0000 may also be used.
6. **Sealing Elements** - Refer to chart at right.
7. * Thinwall/ ** Standard

Pipe ID	60 psi MWP Sealing Element	60 psi MWP Nosepiece	Pipe ID	150 psi MWP Sealing Element	150 psi MWP Nosepiece
12.250-12.311	08-1719-0012-02	08-3322-1502*	12.250-12.311	08-3428-0012-02	08-3322-1502*
12.062-12.124	08-1719-0012-05	08-3322-1502*	12.000-12.061	08-3428-0012-06	08-3322-1502*
11.938-12.375	08-0114-0012-00	08-3322-0002**	11.938-11.999	08-3427-0012-00	08-3322-0002**
11.750-11.811	08-0114-0012-03	08-3322-0002**	11.750-11.811	08-3427-0012-03	08-3322-0002**

Consult factory for unlisted pipe IDs.




North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson



Data Sheet No. **SSII-12**

Fittings

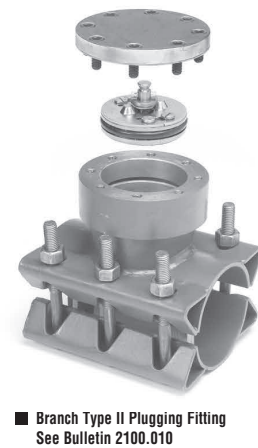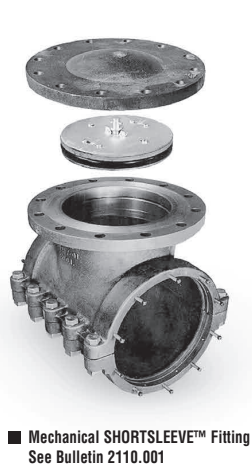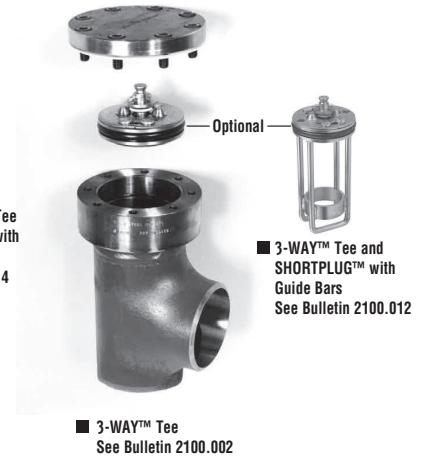

■ Note: Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 3" x 4" Reduced Branch Plugging Machine

(1" Dia. Control Bar)

MAOP up to 150 psi at 100°F


(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. **SSII-3x4**

Date: January 2026


Tapping

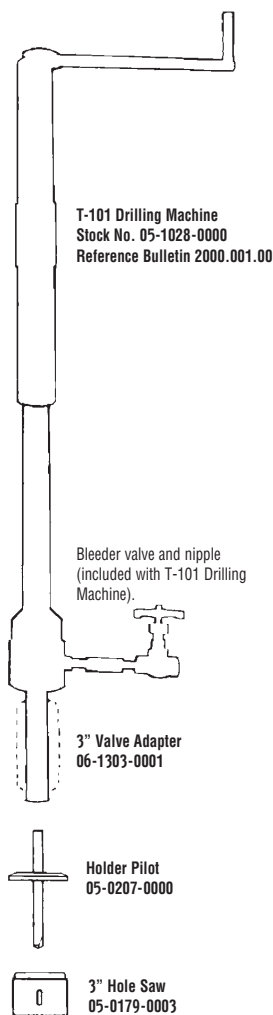

Plugging

3" x 4" Plugging Machine Assembly 08-3501-0304

Includes items below

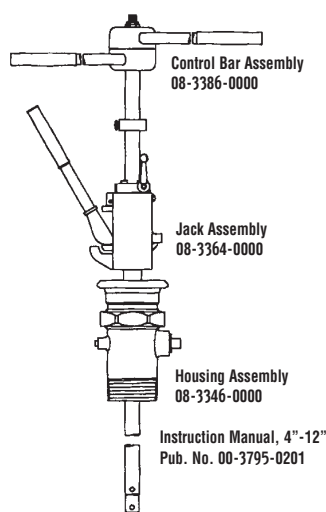

Standard Plugging Head Assembly 08-3326-0000


Includes items below



Chip Sweep (see Note 3) or Sight Glass
Sealing Element Not Included (Note 6)

Bleeder Valve Accessory

Purchased separately




Sight Glass Kit 08-3423-0000-03

See Sight Glass Data Sheet for details

Carrying case for plugging machine
sold separately 08-2481-0004

3" SHORTCUTT® Valve
09-0759-0000
500 psi MWP



3" x 4" SHORTSTOPP®
Welding Fitting
26-0324-0000 (Note 5)



3" x 4" 3-WAY™ Tee
26-0325-0000-01
Standard Outlet
26-0325-0000-02
Thinwall Outlet
(Note 3 and Note 5)



Refer to back for
fitting options.

4" Steel Pipe

- Maximum Working Pressure and Temperature:** 150 psi at 100°F or 120 psi at 180°F. Special cups and/or nosepieces may be required (see chart at right). Pressure rating may be limited by valve selection.
- Solid Completion Plug Holder** - 08-3393-0000
- 3" Plugging Head Kit** adapts folding head plugger to plug 3" size-on-size lines and 3-WAY™ Tee Outlet. Kit 08-3421-0000 includes Plugging Head Assembly 08-3314-0000, chip sweep, and control bar adapter.
- Bleeder valve and nipple** are provided with TDW Drilling

Machines.

- Fitting** - Includes threaded completion plug and cap.
- Sealing Elements** - Refer to chart at right.

Pipe ID	150 psi MWP Sealing Element	150 psi MWP Nosepiece
4.188-4.260	08-2332-0004-00	08-3326-0004
4.062-4.125	08-2332-0004-01	08-3326-0004
3.938-4.026	08-2332-0004-02	08-3326-0004
3.750-3.826	08-2332-0004-03	08-3326-0104

Consult factory for unlisted Pipe ID's.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson



Data Sheet No. **SSII-3x4**


Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** **3" x 4" Gas Main**




■ **Welding Fitting**
 See Bulletin 2100.003.00



■ **3-WAY™ Tee**
 See Bulletin 2100.002.00

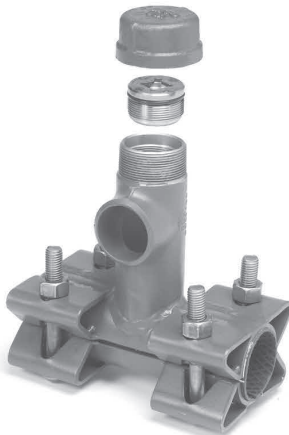

■ **Branch Type II 3-WAY™ Tee**
 See Bulletin 2100.011

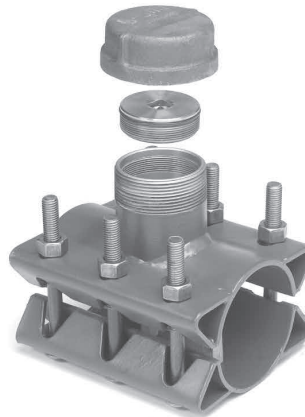

■ **Branch Type II Plugging Fitting**
 See Bulletin 2100.010

■ **Note:** Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 4" x 6" Reduced Branch Plugging Machine

(1-1/4" Dia. Control Bar)

MAOP up to 150 psi at 100°F

(see chart below for nosepiece and sealing element pressure rating)




Data Sheet No. SSII-4x6

Date: January 2026

Tapping


- Note: Either the T-101 or T-203 Tapping Machine is recommended for 4" taps.

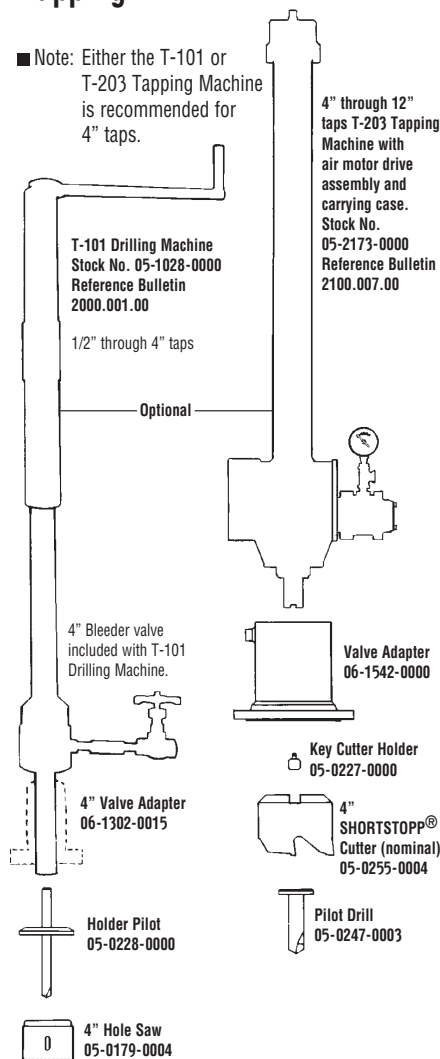

Plugging

4" x 6" Plugging Machine Assembly 08-3501-0406 (with 6" Housing 08-3511-0406)

Includes items below

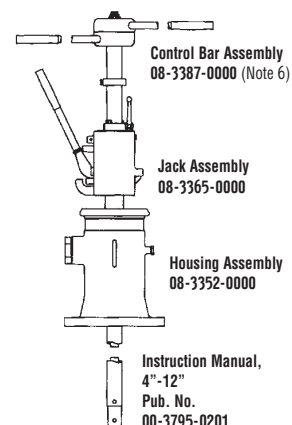

Standard Plugging Head Assembly 08-3327-0000

Includes items below



Chip Sweep (see Note 6) or Sight Glass
Sealing Cup Not Included (Note 7)


Bleeder Valve Accessory

Purchased separately



Sight Glass Kit 08-3424-0000-01 (Note 3)

See Sight Glass Data Sheet for details

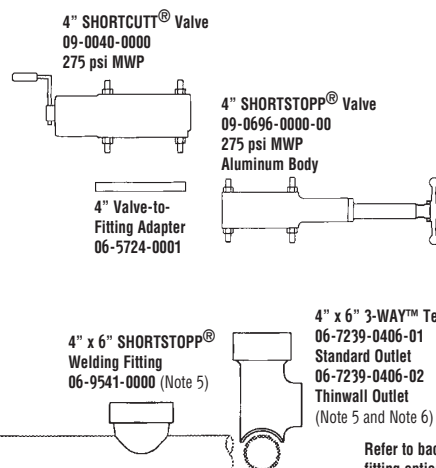

Refer to back for fitting options.

1. **Maximum Working Pressure and Temperature:** 150 psi at 100°F or 120 psi at 180°F. Special cups and/or nosepieces may be required (see chart at right).
2. **Use 4" x 6" Pilot Drill** when making these **reduced branch taps:** use 05-0228-0000 with T-101 and 05-0247-0004 with 360, T-203. Special Tapping Adapter 06-8872-0005 required with T-101 when using with 6" valve.
3. **Sight Glass Kit** - Requires the use of the 4" T-203 Tapping Adapter. Part No. 06-1542-0000
4. **Bleeder valve and nipple** are provided with TDW Drilling

Machines.

5. **Fitting** - Leaf-type completion plug and blind flange included.
6. **4" Plugging Head Kit** adapts 1-1/4" control bar to plug 4" size-on-size lines and 3-WAY™ Tee Outlet. Kit 08-3419-0000 includes Plugging Head Assembly 08-3316-0000, chip sweep, control bar adapter and spacer.
7. **Sealing Elements** - Refer to chart at right.

Pipe ID	150 psi MWP Sealing Element	150 psi MWP Nosepiece
6.250-6.357	08-2332-0006-00	08-3327-1504
6.125-6.188	08-2332-0006-01	08-3327-1504
5.938-6.065	08-2332-0006-02	08-3327-0004
5.750-5.875	08-2332-0006-03	08-3327-0004

Consult factory for unlisted pipe IDs.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson



Data Sheet No. **SSII-4x6**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** **4" x 6" Gas Main**




■ **Welding Fitting**
 See Bulletin 2100.003.00



■ **3-WAY™ Tee**
 See Bulletin 2100.002.00



■ **Branch Type II 3-WAY™ Tee**
 See Bulletin 2100.011

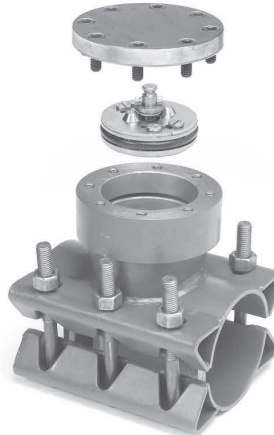

■ **Branch Type II Plugging Fitting**
 See Bulletin 2100.010

■ **Note:** Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 6" x 8" Reduced Branch Plugging Machine

(1-5/8" Dia. Control Bar)

MAOP up to 150 psi at 100°F

(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. SSII-6 x 8

Date: January 2026

Tapping

- Note: T-203 Tapping Machine is recommended for 6" taps.


T-203 Tapping Machine with air motor drive assembly and carrying case.
Stock No. 05-2173-0000
Reference Bulletin 2100.007.00

Valve Adapter
06-1543-0000

Cutter Holder
05-0326-0000

6" SHORTSTOPP®
Cutter (nominal)
05-0330-0006


Pilot Drill
05-0293-0010

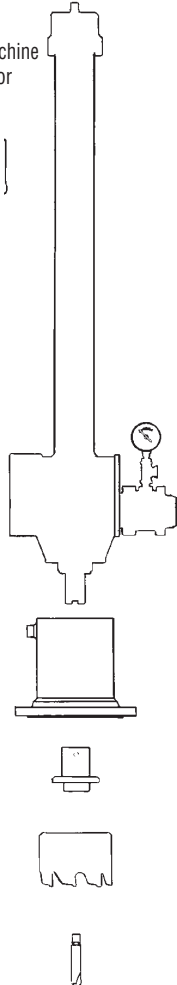

Plugging

6" x 8" Plugging Machine Assembly 08-3501-0608

Includes items below

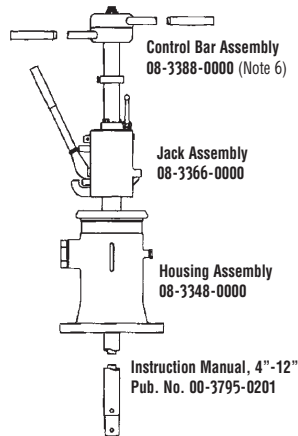

Standard Plugging Head Assembly 08-3329-0000


Includes items below



Chip Sweep (see Note 6) or Sight Glass
Sealing Element Not Included (Note 7)


Bleeder Valve Accessory

Purchased separately



Sight Glass Kit 08-3424-0000-02 (Note 3)

See Sight Glass Data Sheet for details

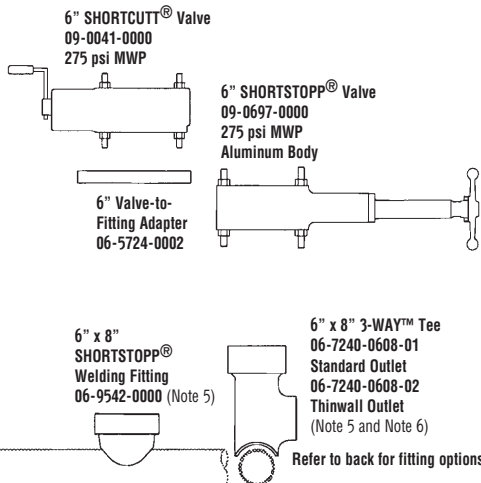

8" Steel Pipe

Refer to back for fitting options.

- Maximum Working Pressure and Temperature:** 150 psi at 100°F or 120 psi at 180°F. Special cups and/or nosepieces may be required (see chart at right).
- Use 6" x 8" Pilot Drill** 05-0293-0010 when making these **reduced branch taps**.
- Sight Glass Kit** - Requires the use of the 6" T-203 Tapping Adapter, Part No. 06-1543-0000
- Bleeder valve and nipple** are provided with TDW Drilling Machines.
- Fitting** - Leaf-type completion plug and blind flange

- included.
- Control bar** can be used with 6" plugging head 08-3318-0000 (includes chip sweep) to plug 6" size-on-size lines and 3-WAY™ Tee Outlet.
- Sealing Elements** - Refer to chart at right.

Pipe ID	150 psi MWP Sealing Element	150 psi MWP Nosepiece
8.250-8.329	08-2332-0008-00	08-3329-1504
8.062-8.188	08-2332-0008-01	08-3329-1504
7.875-8.000	08-2332-0008-02	08-3329-0004
7.625-7.812	08-2332-0008-03	08-3329-0004

Consult factory for unlisted Pipe ID's.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson



Data Sheet No. **SSII-6x8**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** 6" x 8" Gas Main




■ **Welding Fitting**
See Bulletin 2100.003.00



■ **3-WAY™ Tee**
See Bulletin 2100.002.00



■ **Branch Type II 3-WAY™ Tee**
See Bulletin 2100.011

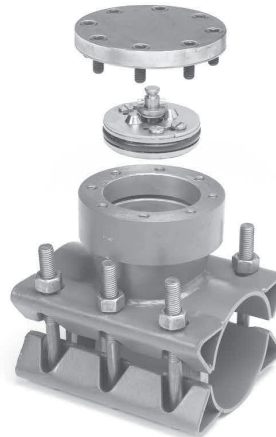

■ **Branch Type II Plugging Fitting**
See Bulletin 2100.010

■ **Note:** Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 8" x 10" Reduced Branch Plugging Machine

(2-1/2" Dia. Control Bar)

MAOP up to 150 psi at 100°F


(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. SSII-8x 10

Date: January 2026


Tapping

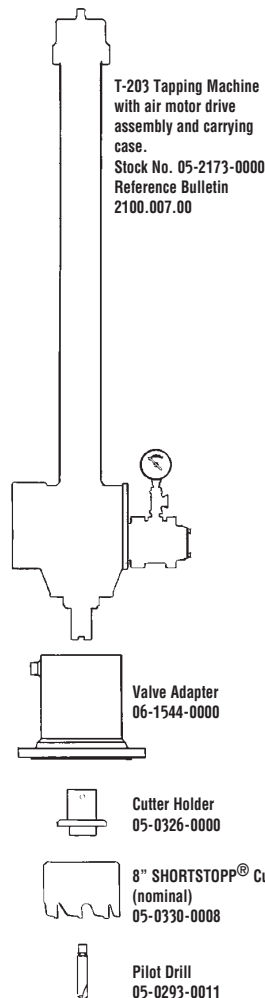

Plugging

8" x 10" Plugging Machine Assembly 08-3501-0810

Includes items below

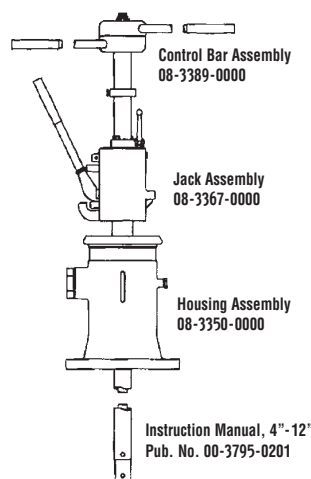

Standard Plugging Head Assembly 08-3330-0000


Includes items below



Chip Sweep (see Note 6) or Sight Glass
Sealing Element Not Included (Note 8)


Bleeder Valve Accessory

Purchased separately



Sight Glass Kit 08-3424-0000-02 (Note 3)

See Sight Glass Data Sheet for details

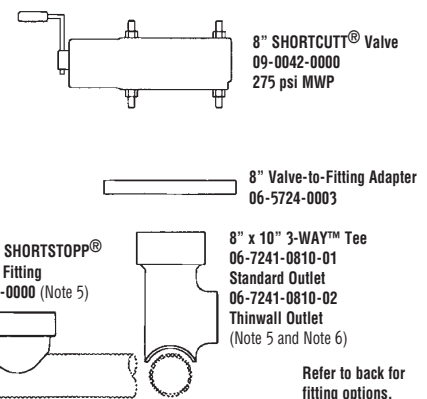

Refer to back for fitting options.

10" Steel Pipe

- Maximum Working Pressure and Temperature:** 150 psi at 100°F or 120 psi at 180°F. Special cups and/or nosepieces may be required (see chart at right).
- Use 8" x 10" Pilot Drill 05-0293-0011 for reduced branch taps.** With 660/760 Tapping Machine use 8" x 12" Tapping Adapter 06-6102-0017.
- Sight Glass Kit** - Requires the use of the 8" T-203 Tapping Adapter. Part No. 06-1544-0000
- Bleeder valve and nipple** are provided with TDW Drilling Machines.
- Fitting** - Leaf-type completion plug and blind flange included.
- 8" Plugging Head Kit** adapts folding head plugger to plug 8" size-on-size lines and 3-WAY™ Tee Outlet. Kit 08-3420-0000 includes Plugging Head Assembly 08-3320-0000, chip sweep, and adapter.
- With an **8" x 12" Plugging Head**, Nosepiece and Cup, 12" pipe can be plugged. (See 8" x 12" Data Sheet.)
- Sealing Elements** - Refer to chart at right.

Pipe ID	150 psi MWP Sealing Element	150 psi MWP Nosepiece
10.250-10.375	08-2332-0010-00	08-3330-1504
10.062-10.188	08-2332-0010-01	08-3330-1504
9.938-10.020	08-2332-0010-02	08-3330-0004
9.688-9.875	08-2332-0010-03	08-3330-0004

Consult factory for unlisted Pipe ID's.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson



Data Sheet No. **SSII-8x10**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** **8" x 10" Gas Main**




■ **Welding Fitting**
 See Bulletin 2100.003.00



■ **3-WAY™ Tee**
 See Bulletin 2100.002.00



■ **Branch Type II 3-WAY™ Tee**
 See Bulletin 2100.011

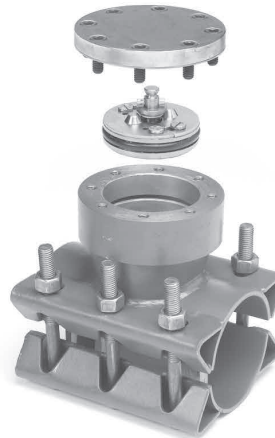

■ **Branch Type II Plugging Fitting**
 See Bulletin 2100.010

■ **Note:** Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

SHORTSTOPP® II 8" x 12" Reduced Branch Plugging Machine

(2-1/2" Dia. Control Bar)


MAOP up to 150 psi at 100°F

(see chart below for nosepiece and sealing element pressure rating)



Data Sheet No. SSII-8x12
Date: January 2026


Tapping

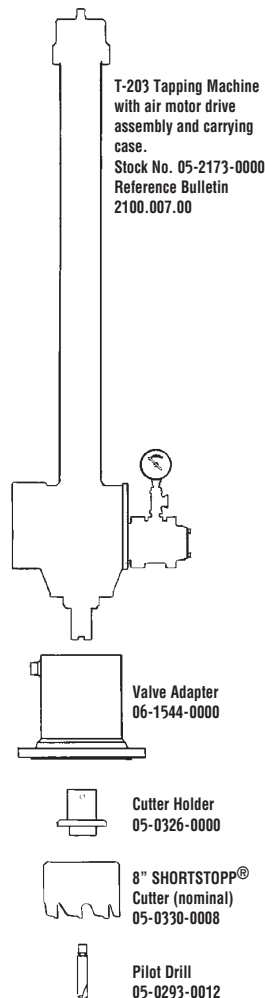

Plugging

8" x 12" Plugging Machine Assembly 08-3501-0812

Includes items below

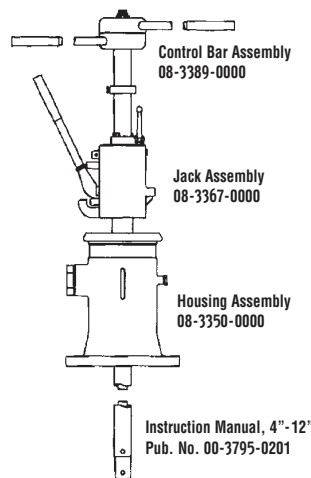

Standard Plugging Head Assembly 08-3331-0000


Includes items below



Chip Sweep (see Note 6) or Sight Glass
Sealing Element Not Included (Note 8)


Bleeder Valve Accessory

Purchased separately



Sight Glass Kit 08-3424-0000-02 (Note 3)

See Sight Glass Data Sheet for details

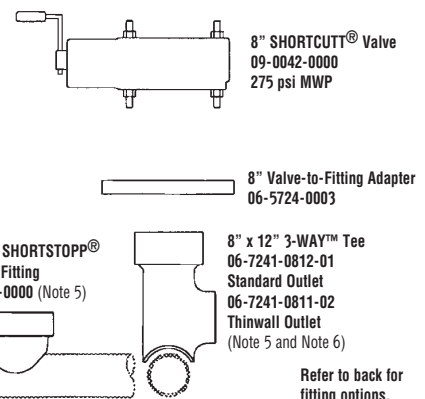

12" Steel Pipe

Refer to back for fitting options.

- Maximum Working Pressure and Temperature:** 150 psi at 100°F or 120 psi at 180°F. Special cups and/or nosepieces may be required (see chart at right).
- Use 8" x 12" Pilot Drill** 05-0293-0012 and **8" x 10/12" Tapping Adapter** 06-6102-0017 when making these reduced branch taps, with 660 or 760 TM.
- Sight Glass Kit** - Requires the use of the 8" T-203 Tapping Adapter. Part No. 06-1544-0000
- Bleeder valve and nipple** are provided with TDW Drilling Machines.
- Fitting** - Leaf-type completion plug and blind flange included.
- 8" Plugging Head Kit** adapts folding head plunger to plug 8" size-on-size lines and 3-WAY™ Tee Outlet. Kit 08-3420-0000 includes Plugging Head Assembly 08-3320-0000, chip sweep, and adapter.
- With an **8" x 10" Plugging Head Assembly** Nosepiece and Cups, 10" pipe can be plugged. (See 8" x 10" Data Sheet.)
- Sealing Elements** - Refer to chart at right.

Pipe ID	150 psi MWP Sealing Element	150 psi MWP Nosepiece
12.250-12.390	08-2332-0012-00	08-3331-1504
12.062-12.188	08-2332-0012-01	08-3331-1504
11.875-12.000	08-2332-0012-02	08-3331-0004
11.688-11.812	08-2332-0012-03	08-3331-0004

Consult factory for unlisted Pipe ID's.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2023 T.D. Williamson



Data Sheet No. **SSII-8x12**

Fittings ***Tapping and SHORTSTOPP® II Plugging Machine*** **8" x 12" Gas Main**



■ **Welding Fitting**
 See Bulletin 2100.003.00



■ **3-WAY™ Tee**
 See Bulletin 2100.002.00



■ **Branch Type II 3-WAY™ Tee**
 See Bulletin 2100.011



■ **Branch Type II Plugging Fitting**
 See Bulletin 2100.010

■ **Note:** Consult your TDW representative for additional fitting options.

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

Sight Glass Assembly for 1-1/4" - 3"



Applications 08-3423-0000-SUFFIX



Data Sheet No. **SG 1-1/4 - 3**

Date: September 2020

Supersedes: September 2004

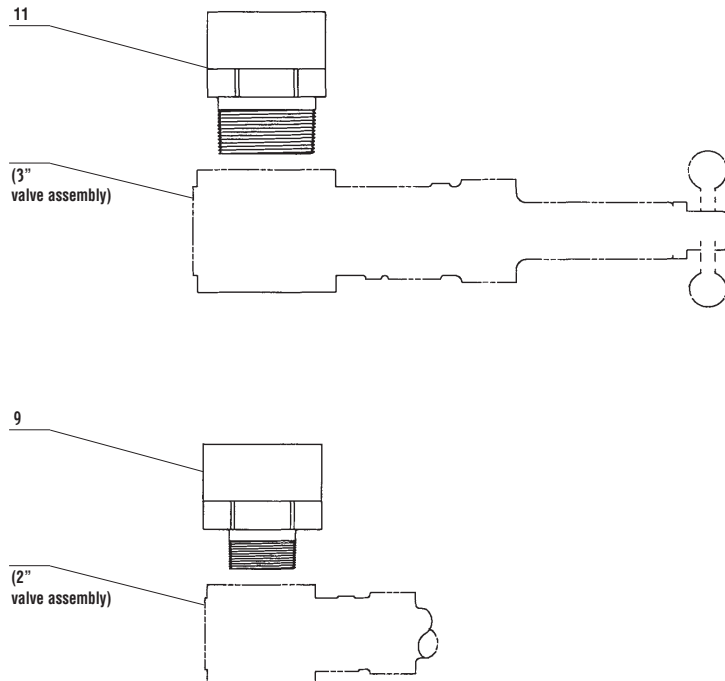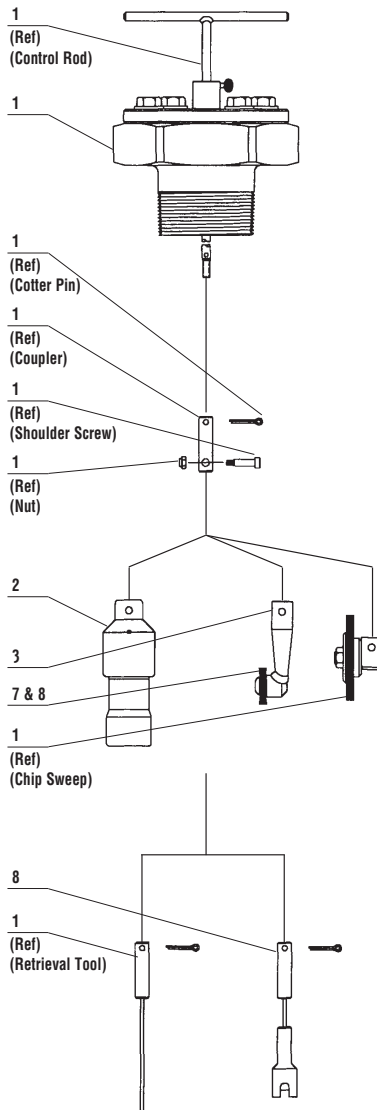

Item	Quantity by Suffix (Note 3)				Description	Part Number
	-03	-02	-01	-00		
1	1	1	1	1	Sight Glass Assembly	08-2340-0000
2	1	1	-	1	Chip Remover Assembly (2" - 4")	08-2341-0000
3	-	-	1	1	Plugging Head (1-1/4")	08-0352-0001-01
6	-	-	1	1	Wire Brush (1-1/4")	00-0025-0061
7	-	-	1	1	Button Head Socket Cap Screw	00-0307-0600-05
8	1	1	1	1	Magnet Assembly	08-3426-0000
9	-	1	1	1	Reducer (3" x 2")	08-2340-0004
11	1	-	-	1	Adapter (3")	08-2340-0005

1. **Maximum Working Pressure:** 500 psi at 100°F
2. **Maximum Working Temperature:** 180°F at 440 psi
3. **Sight Glass Assembly for Inspection/Retrieval with Chip Sweep Only** (no magnets) use Item 1, 08-2340-0000. For 2" applications, Item 9 is also required, 08-2340-0004.
4. **Kit Suffix Number and Pipe Size** - Refer to chart at right.
5. **Cross Indexing Number:** SHORTSTOPP® II Bulletin 2080.001.00; T-101 Bulletin 2000.001.00.

Suffix	Nom. Pipe Size
-00	1-1/4" - 3"
-01	1-1/4" - 1-1/2"
-02	2"
-03	3" - 4"

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson

Sight Glass Assembly for 4"-12"


Applications 08-3424-0000-SUFFIX




Data Sheet No. **SG 4-12**

Date: September 2020

Supersedes: September 2004

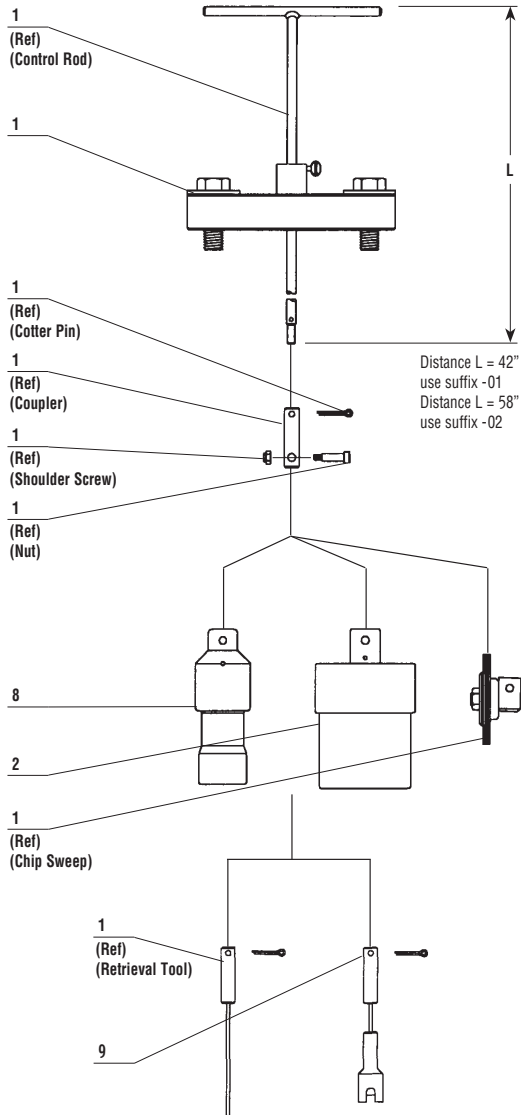

(T-203
Tapping Adapter)
(note 5)

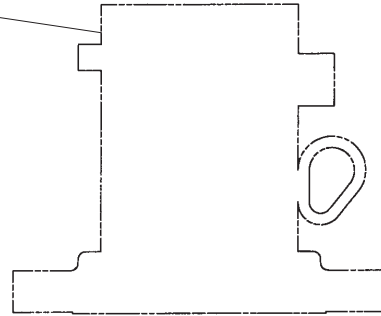

Item	Quantity by Suffix (Note 3)			Description	Part Number
	-02	-01	-00		
1	-	1	-	Sight Glass Assembly (4"-6")	08-2339-0000-01
1	1	-	1	Sight Glass Assembly (8"-12")	08-2339-0000-02
2	1	-	1	Chip Remover Assembly (6"-12")	08-3422-0000
8	-	1	1	Chip Remover (2"-4")	08-2341-0000
9	1	1	1	Chip Remover (2")	08-3426-0000

1. **Maximum Working Pressure:** 500 psi at 100°F
2. **Maximum Working Temperature:** 180°F at 440 psi
3. **Sight Glass Assembly for Inspection/Retrieval with Chip Sweep Only** (no magnets) use Item 1 for appropriate size range shown, 08-2339-0000 SUFF. To cover the complete size range 4"-12", use 08-2339-0000-02
4. Sight Glass requires T-203 Tapping Adapter. (not included)
5. **Kit Suffix Number and Pipe Size** - Refer to chart at right.
6. **Cross Indexing Number:** SHORTSTOPP® II Bulletin 2080.001.00; T-203 Bulletin 2100.007.00.

Suffix	Nom. Pipe Size
-00	4"-12"
-01	4"-6"
-02	8"-12"

North & South America: +1 918 447 5000 ■ Europe / Africa / Middle East: +32 67 28 3611 ■ Asia Pacific: +65 6364 8520 ■ www.tdwilliamson.com

Data subject to change without notice. / Dimensions not for construction unless certified. / © Registered trademark of T.D. Williamson in the United States and other countries. / TM Trademark of T.D. Williamson in the United States and other countries. / ©2020 T.D. Williamson